



## Hojas dozer con angulación hidráulica

Dozer blades with hydraulic angling




# Características Specifications




▲ Serie V

▲ Serie U

▲ Serie X

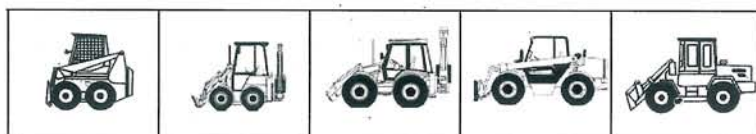

▲ Sencilla y rápidamente acoplable a una gran cantidad de máquinas  
Easily and quickly attached to different machines

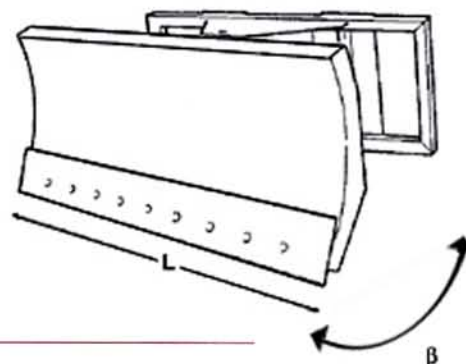

## Especificaciones Técnicas Technical features

Modelo Model	L	β	Altura Height	Peso Weight
	(m)		(mm)	(Kg)
DBH.1220V(*)	1.22	+30°	600	195
DBH.1370V(*)	1.37	+30°	600	205
DBH.1520V(*)	1.52	+30°	600	215
DBH.1670V(*)	1.67	+30°	600	225
DBH.1820V(*)	1.82	+30°	600	235
DBH.1900V(*)	1.90	+30°	600	240
DBH.2000V(*)	2.00	+30°	600	246
DBH.2200V(*)	2.20	+30°	600	260
DBH.2000VH(*)	2.00	+30°	700	480
DBH.2200VH(*)	2.20	+30°	700	505
DBH.2400VH(*)	2.40	+30°	700	535
DBH.2600VH(*)	2.60	+30°	700	565
DBH.2750XH(*)	2.75	+30°	900	800
DBH.1500U	1.50	+30°	550	240
DBH.1600U	1.60	+30°	550	250
DBH.1800U	1.80	+30°	550	265
DBH.2100U	2.00	+30°	550	290
DBH.2400U	2.40	+30°	550	315

β - Angulación horizontal hidráulica.  
- Hydraulic horizontal angulation.

(\*) - Entregas estándar con 1 hoja de goma y una de acero.  
- Standard delivered with 1 rubber and 1 steel blade.

