



Cucharones Trituradores Frontales

Frontal Crushing Buckets



Características Specifications



- ▲ Permite triturar gran variedad de material residual: hormigón, cemento armado, vidrio, áridos, placas de asfalto, ladrillos, baldosas, etc.
Many waste materials can be crushed: concrete, glass, reinforced concrete, tiles, asphalt slabs, etc.



Tamaño material triturado
Size of the material crushed


0 - 30 mm
0 - 50 mm
0 - 70 mm
0 - 100 mm

- ▲ Dientes de corte, fácilmente desmontables y reemplazables, para obtener diferentes dimensiones del material triturado.
Cutters are easy to remove and replace to obtain different size of the spoil crushed.

Características Specifications



▲ Detalle dientes de corte
Detail cutters

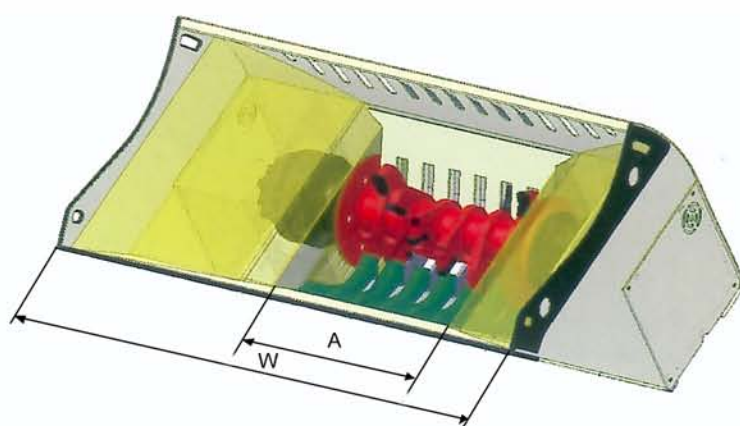

◀ Sencilla y rápidamente
acoplable a una gran cantidad
de vehículos

Easily and quickly attached to
the machine

Especificaciones Técnicas Technical features

Modelo Model	Capacidad Capacity (LSAE)	Dientes Cutters	A (mm)	W (mm)	Lpm	Bar	Peso Weight (Kg)
FCB1400	230	4X2	450	1400	45 - 70	300 - 180	550
FCB1450	310	4X2	450	1450	45 - 70	300 - 180	610
FCB1500	340	5X2	550	1500	60 - 90	300 - 180	725
FCB1600	430	5X2	550	1600	60 - 90	300 - 180	770
FCB1700	520	6X2	650	1700	60 - 90	300 - 180	820
FCB1800	610	6X2	650	1800	60 - 90	300 - 180	925
FCB1900	730	6X2	650	1900	60 - 90	300 - 180	1200
FCB2100	800	8X2	850	2100	80 - 140	300 - 180	1620
FCB2300	1300	8X2	850	2300	80 - 140	300 - 180	2060

